



## Standard Header Orientations


### 14 Pin Dual Row




**N01**




**N03**



**N05**




**N07**




**N09**


### 14 Pin Single Row

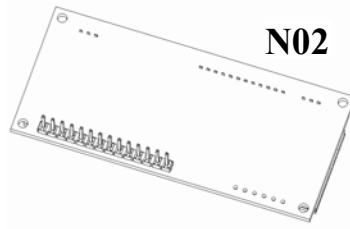


**N02**

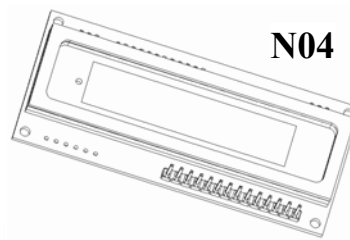


**N04**

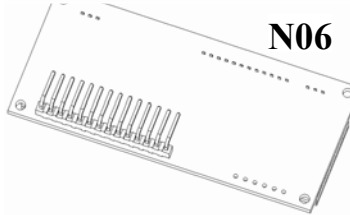

**N06**

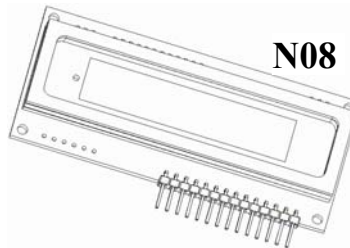


**N08**

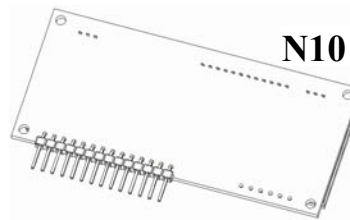


**N10**


### 6 Pin Single Row




**S02**




**S04**




**S06**



**S08**



**S10**

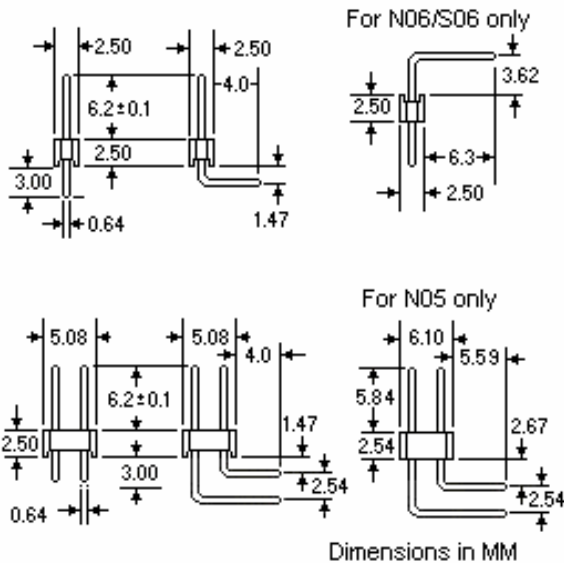

### Noritake Standard Header Specifications:

#### **Material:**

- Insulator: UL94V-O/PBT glass filled
- Color: Black
- Operating Temp: -55°C to +105°C
- Contact: Brass
- Plating: Min. 5μ" gold over nickel

#### **Electrical:**

- Current rating: 3AMP Max.
- Contact resistance: 20 Milliohms Max.
- Insulation resistance: 1000 Megohms Min.
- Dielectric withstanding voltage: 1000V AC