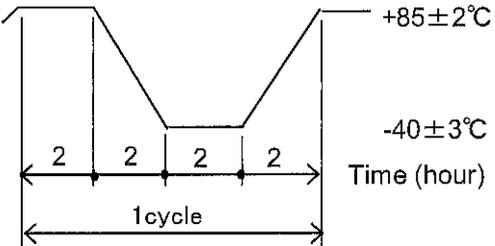


# EMI Shield window Reliability Test Condition

No. TT-12-3002B  
Noritake Itron Corp.

		Test Conditions	Criteria
Function Durability Test	Temperature Cycling	Conditions :  Cycle : 25cycles	A
	High Temperature Storage	Temperature : +85±2°C Duration : 96 hours	A
Environmental Test	Humidity (steady state)	Temperature : 40±2°C Humidity : 90~95%RH (No dewing) Duration : 96hours	A

## CRITERIA

The sign of judgment	Contents of judgment
	Transmittance fluctuation within -20% No corrosion of a terminal and crack , lack part.

Notes1 ; Except an environmental temperature test when there is no specification it carries out at room temperature.